



APPLICATION		REVISION			
NEXT ASSY	USED ON	LTR	DESCRIPTION	DATE	APPROVED

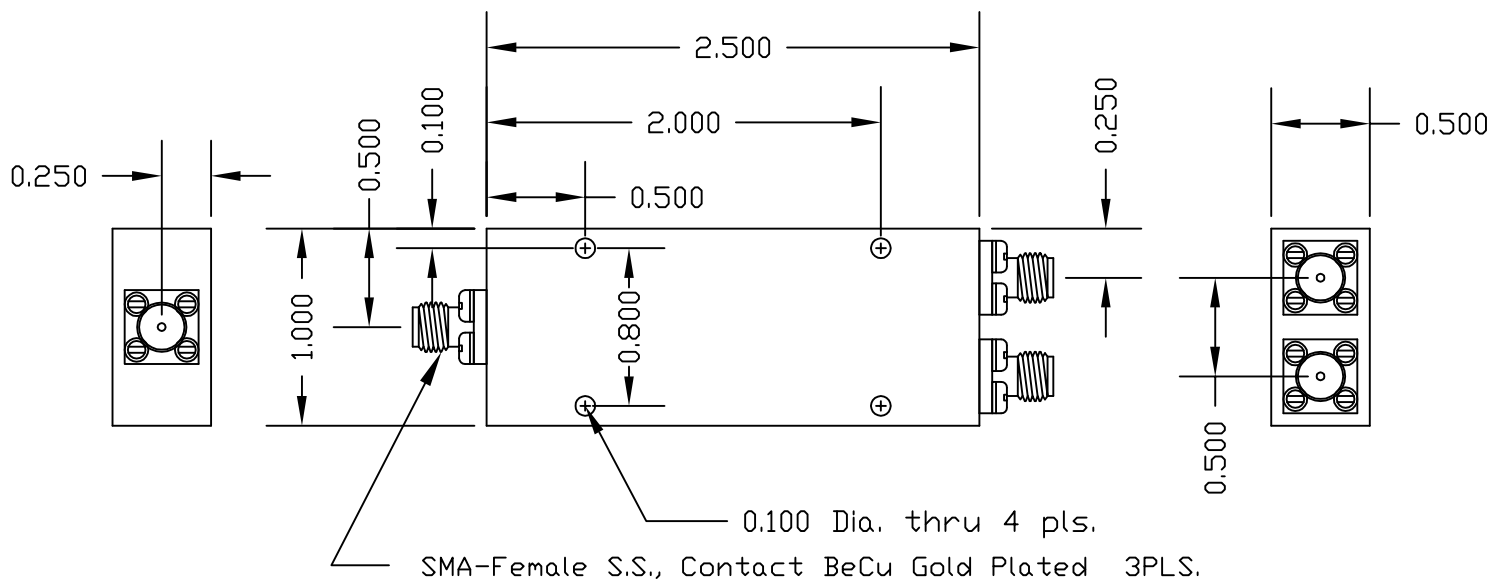

Specifications:

Frequency Range: 300 to 7250 MHz  
 Insertion Loss: 1.1 db Max.  
 VSWR: 1.65:1 Max. \*(1)  
 Isolation: 20 db Min. \*(2)  
 Amp. Balance: +/-0.3 db Max.  
 Phase Balance: +/- 3 degree Max.  
 Input Power 30WCW Max.

\*Isolation: 15 db Min. from 300 to 7250 MHz  
 \*Isolation: 20 db Min. from 400 to 7000 MHz  
 \*VSWR: 1.5:1 Max. Output Ports

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.03 ± .XXX ±.01	CONTRACT NO.		 <b>TAYLOR MICROWAVE, INC.</b> 14250 S.W. 23rd LANE, MIAMI FL 33175
	APPROVALS	DATE	
MATERIAL	DRAWN J.B.	11/24	TITLE  2 Way Power Divider
	CHECKED		
FINISH  GREY PAINT	E.E. B.S.	11/24	SIZE CODE IDENT NO. DRAWING NO. A OE3Y7 PD2-0372S
	DO NOT SCALE DRAWING		SCALE NONE CAD 13 SHEET 1 OF 1